- FR
- NL
- Outdoor Camera led varifocal 9-22 mm
- DE
- ES

430 517

- PT
- PL
- EL
- RU
- TR

FR LU BE CH

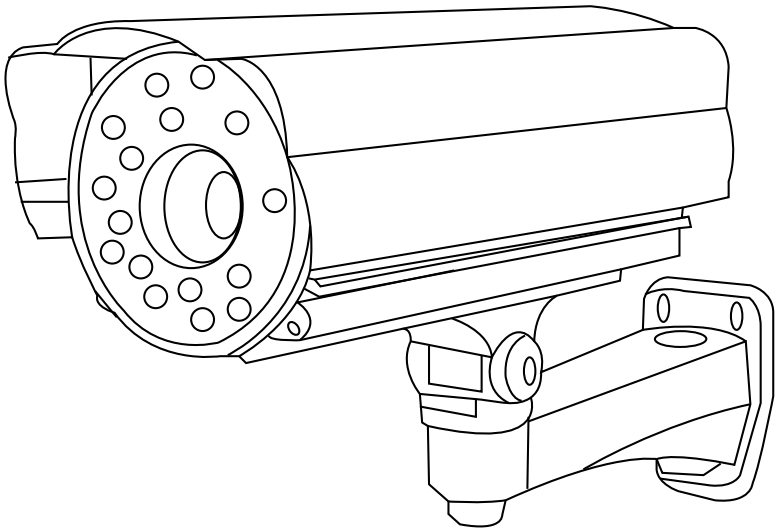

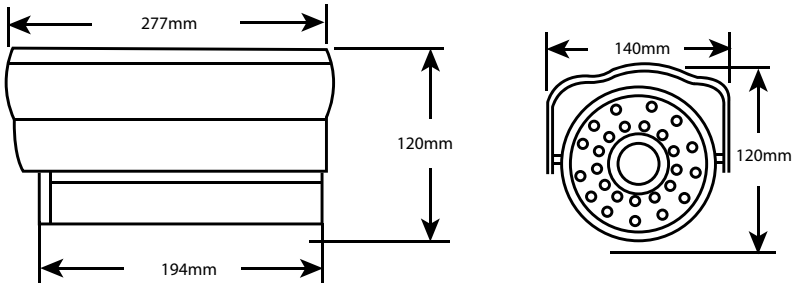

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

Safety instructions FR LU BE CH

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

LE04693AA

Installation

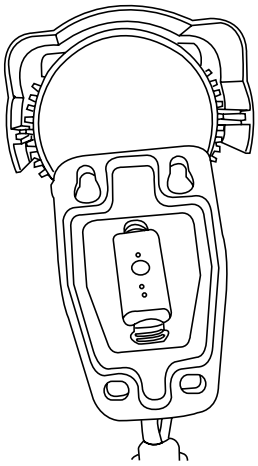

1 - Pull off the cable to access to the zoom and focus control.

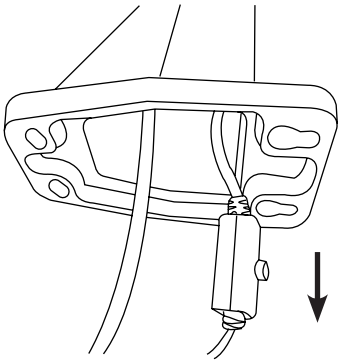

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

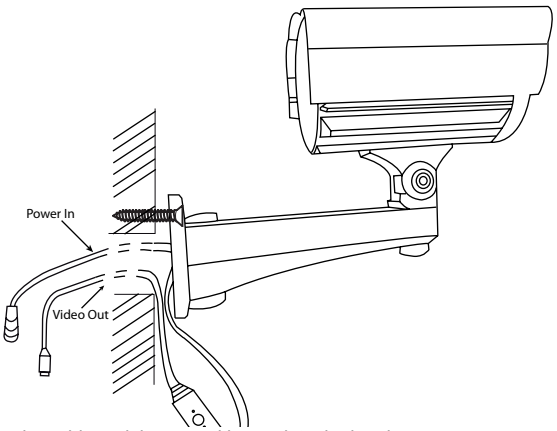

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

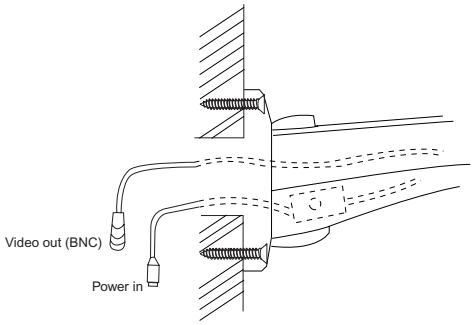

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

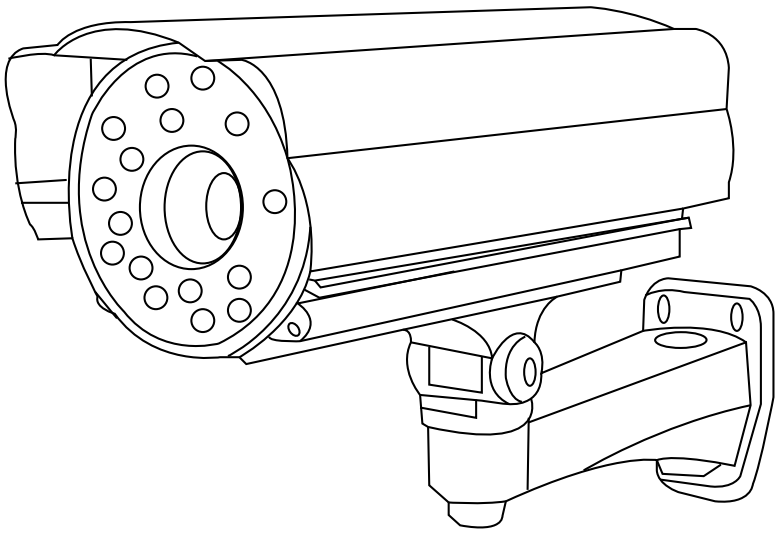

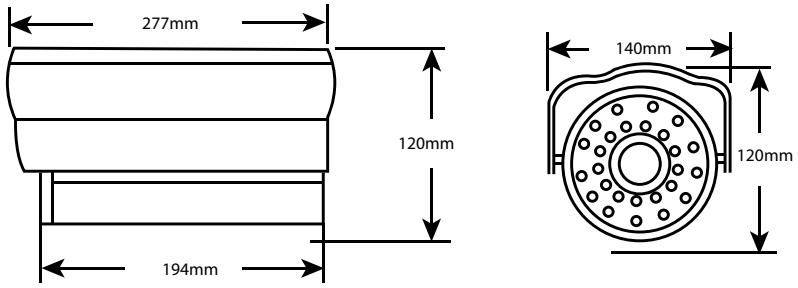

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

Safety instructions NL BE

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

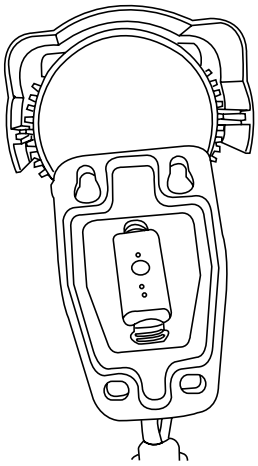

1 - Pull off the cable to access to the zoom and focus control.

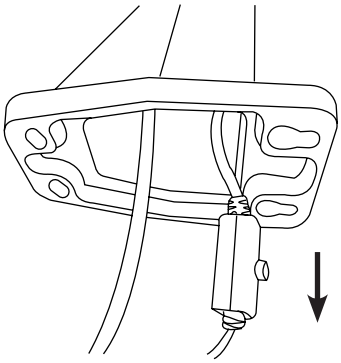

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

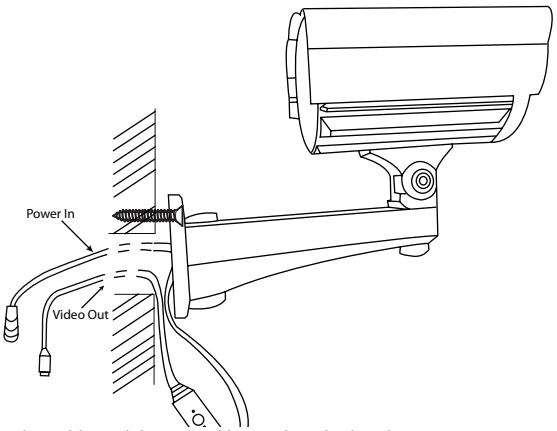

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

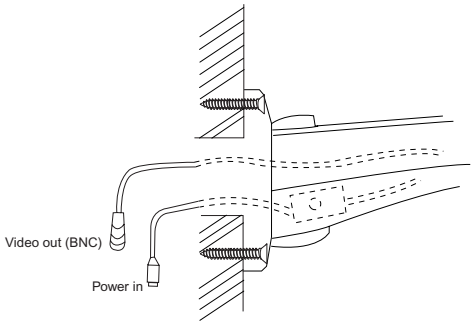

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

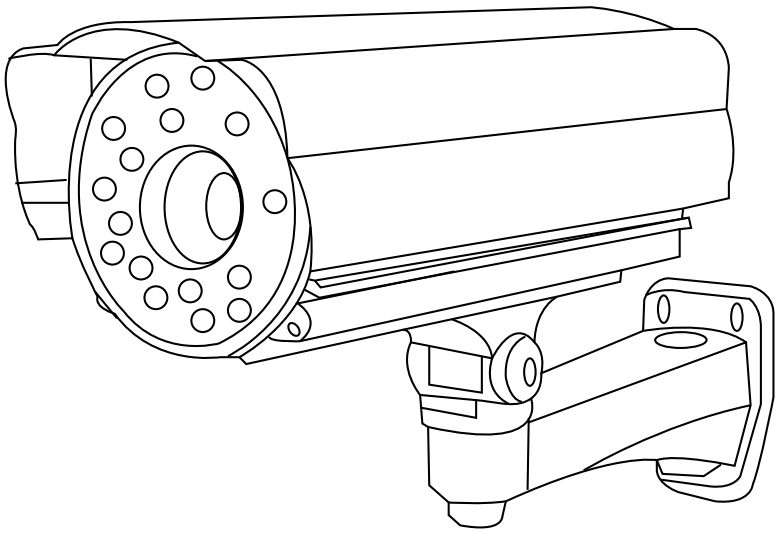

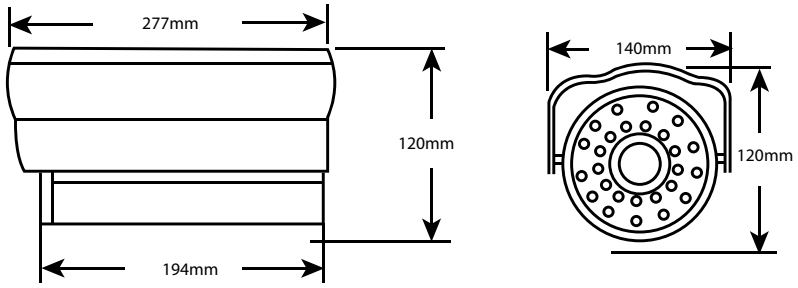

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

⚠ Safety instructions GB IE

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

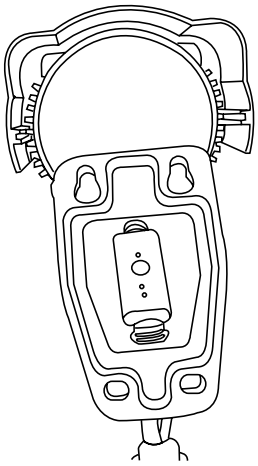

1 - Pull off the cable to access to the zoom and focus control.

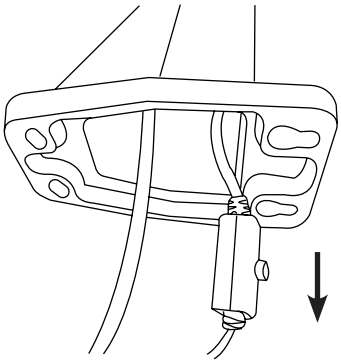

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

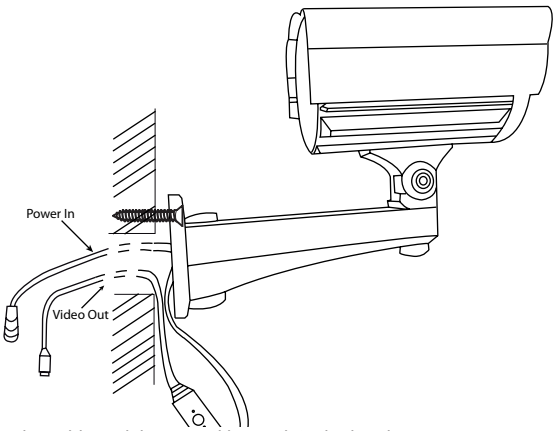

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

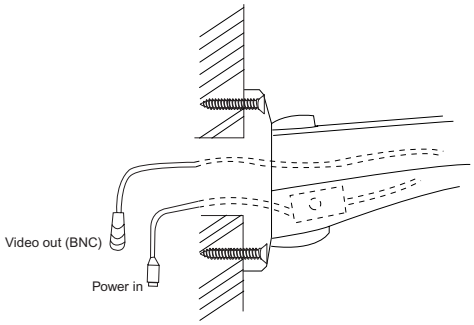

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

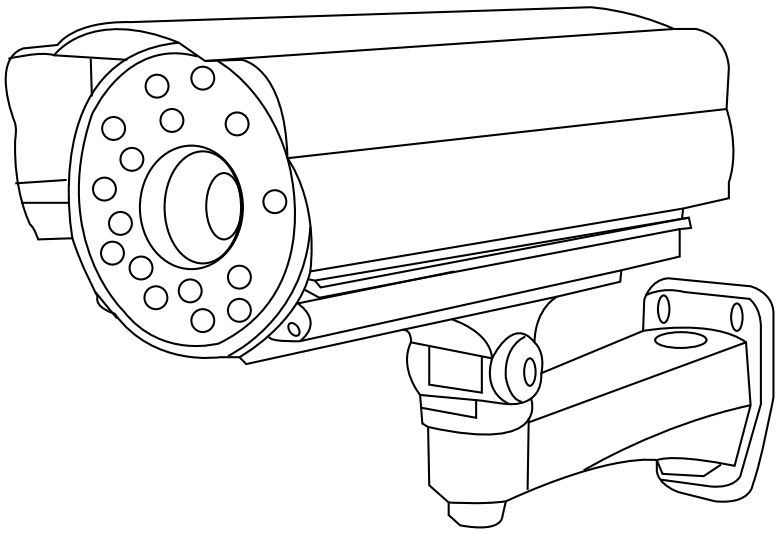

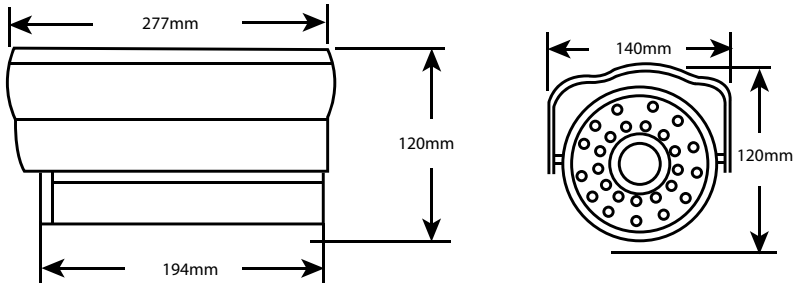

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

⚠ Safety instructions (DE)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

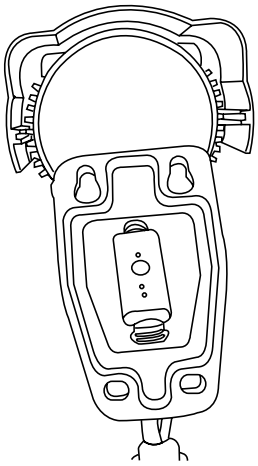

1 - Pull off the cable to access to the zoom and focus control.

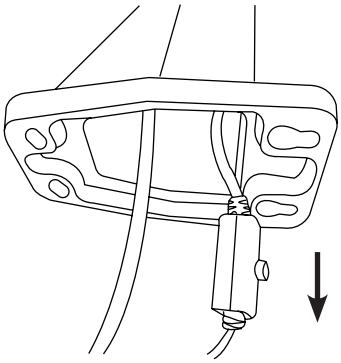

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

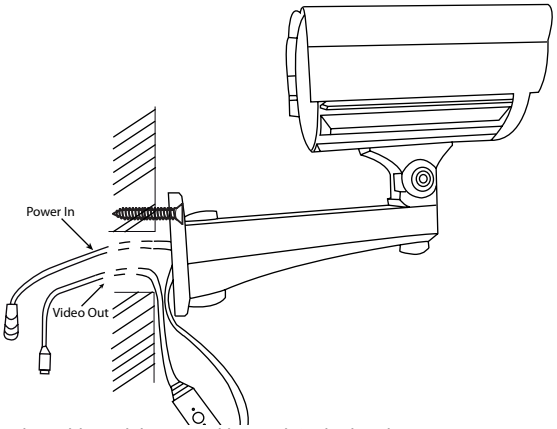

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

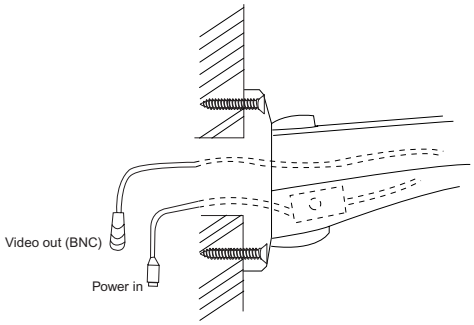

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

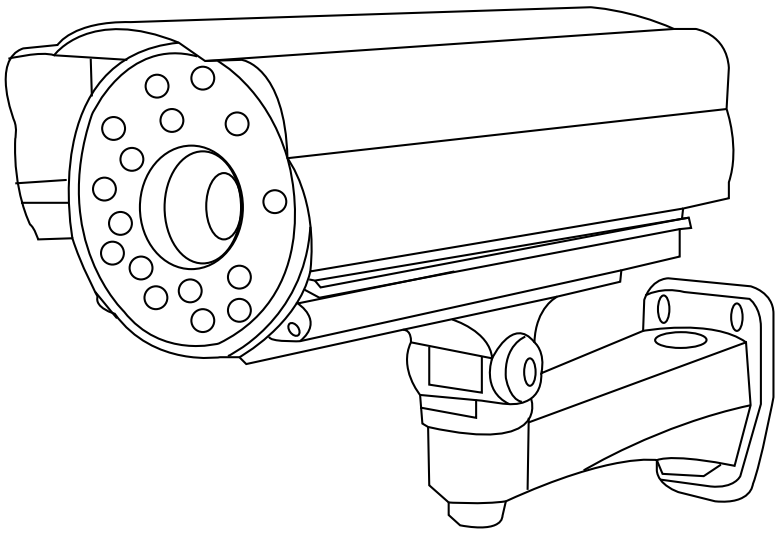

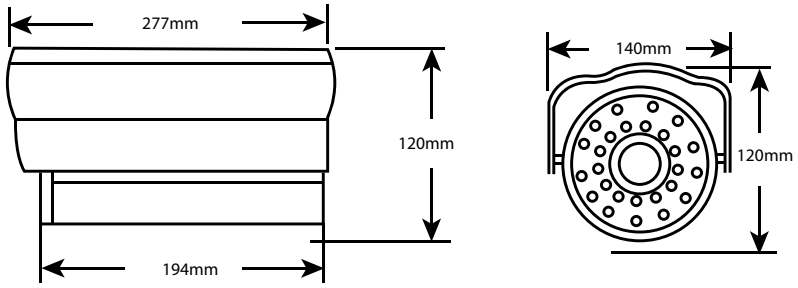

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

⚠ Safety instructions (ES)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

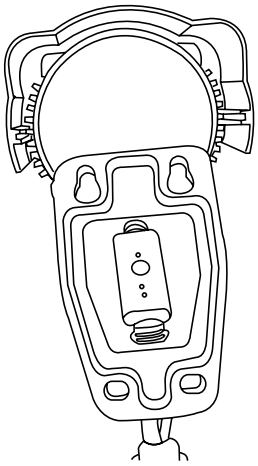

1 - Pull off the cable to access to the zoom and focus control.

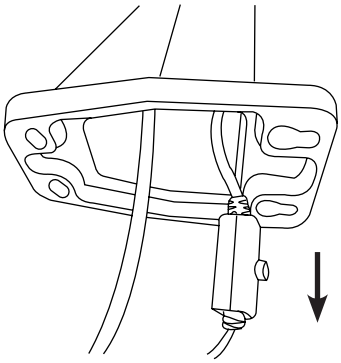

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

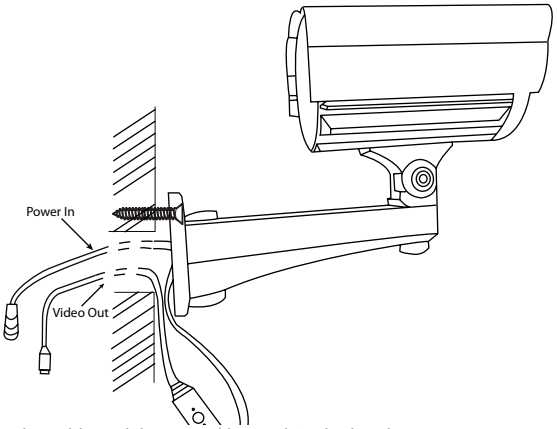

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

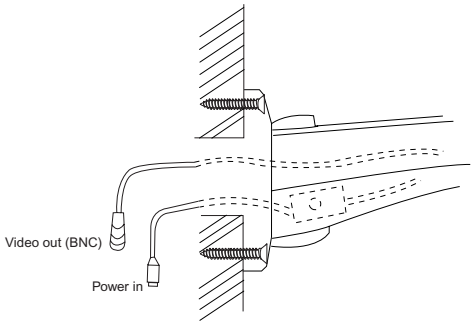

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

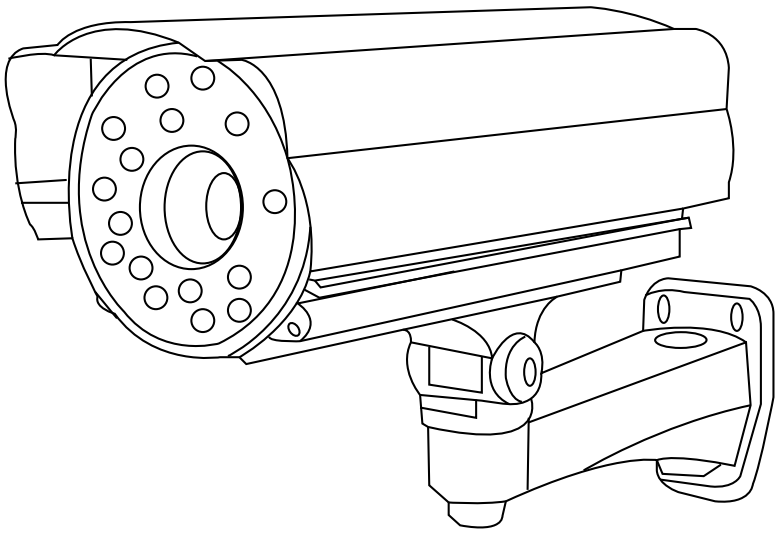

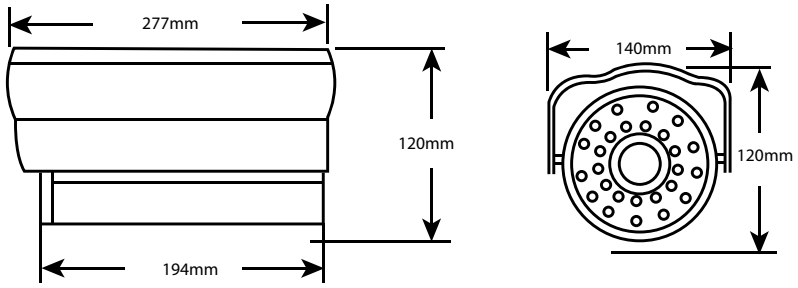

PT

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

⚠ Safety instructions (PT)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

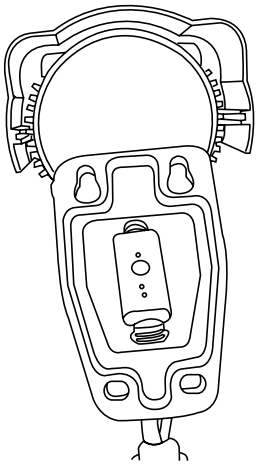

1 - Pull off the cable to access to the zoom and focus control.

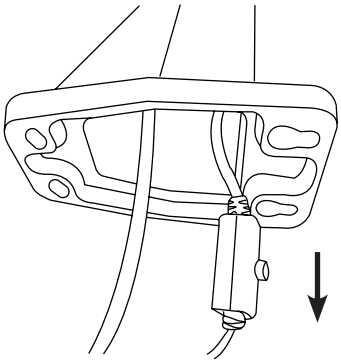

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

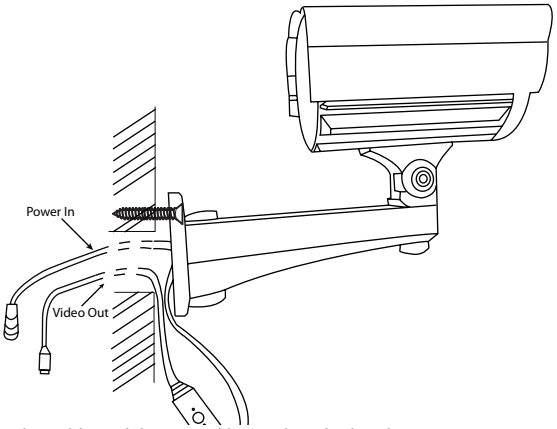

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

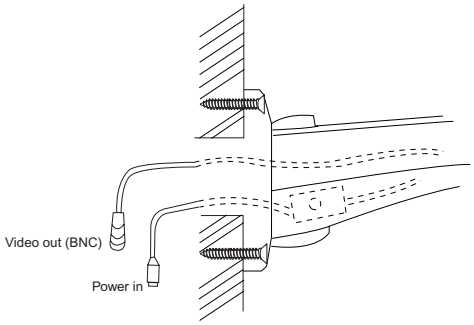

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

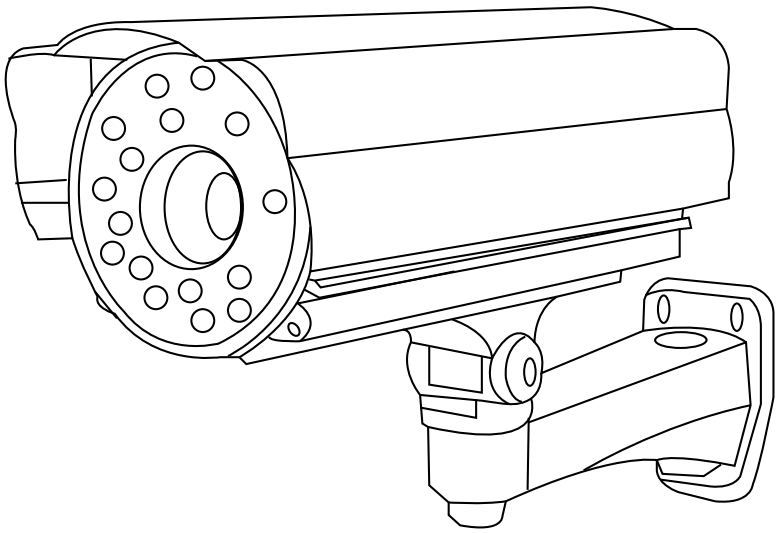

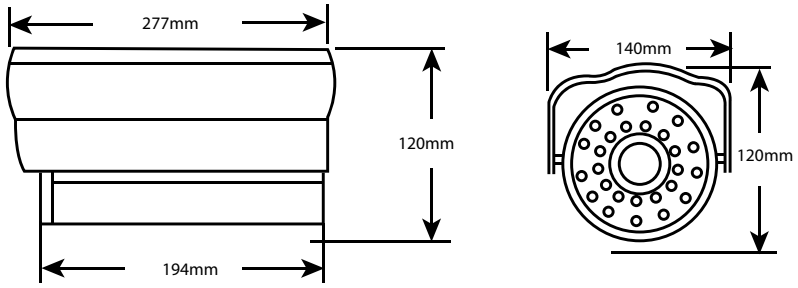

PL

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

⚠ Safety instructions (PL)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

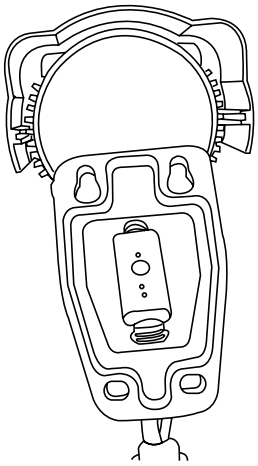

1 - Pull off the cable to access to the zoom and focus control.

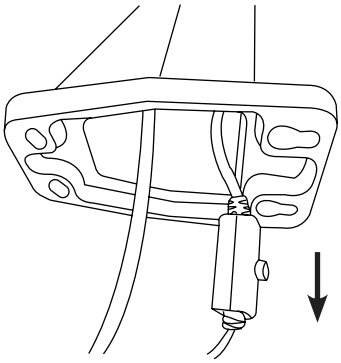

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

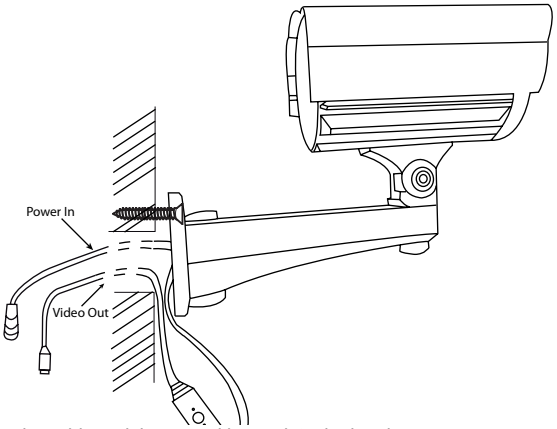

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

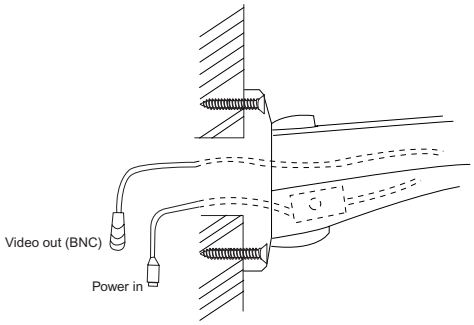

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

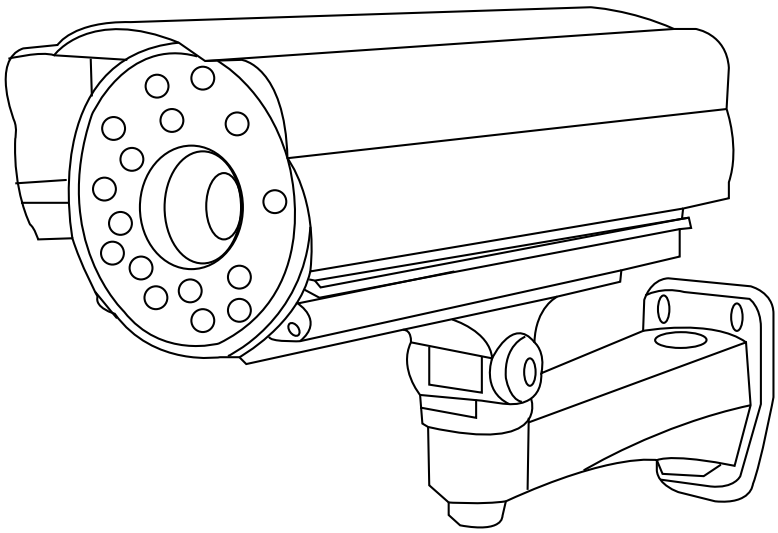

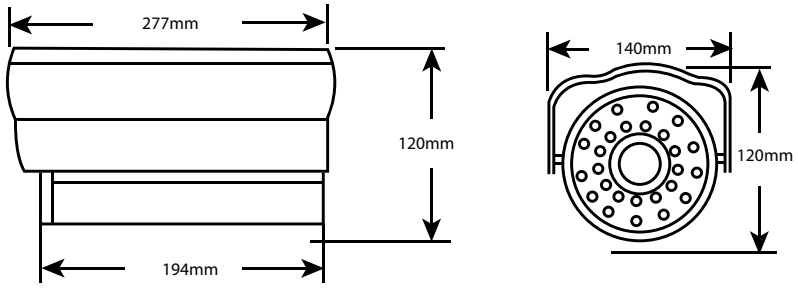

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

⚠ Safety instructions GR CY

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

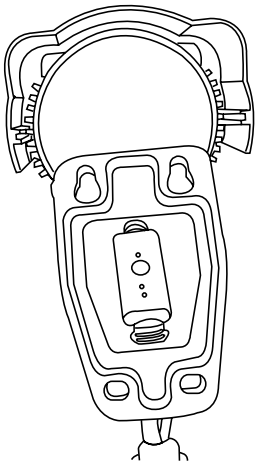

1 - Pull off the cable to access to the zoom and focus control.

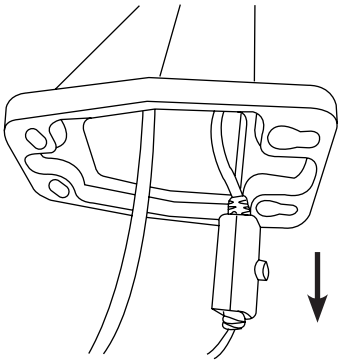

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

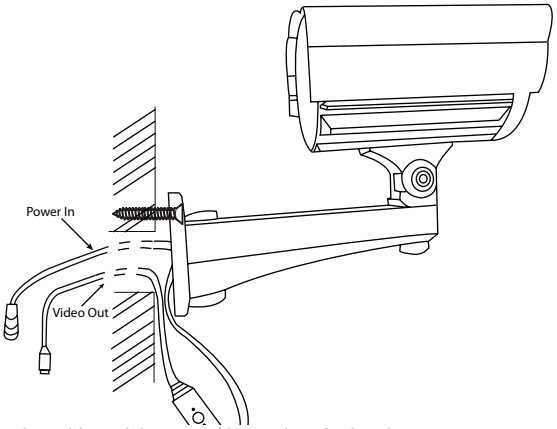

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

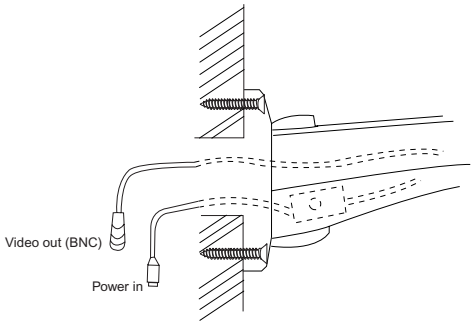

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

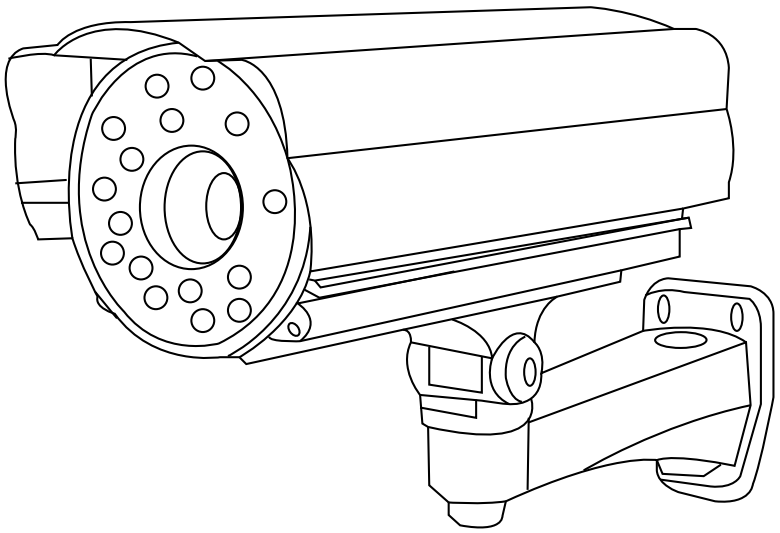

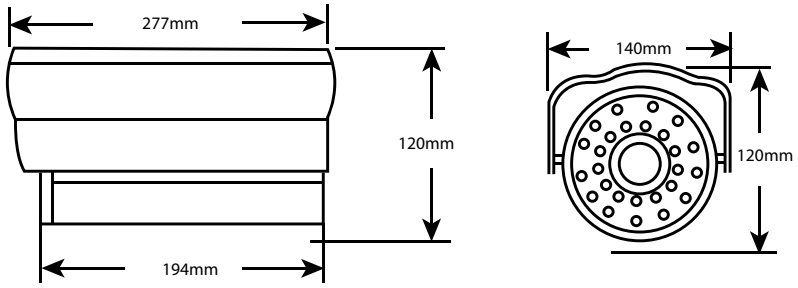

RU

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

Safety instructions (RU)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

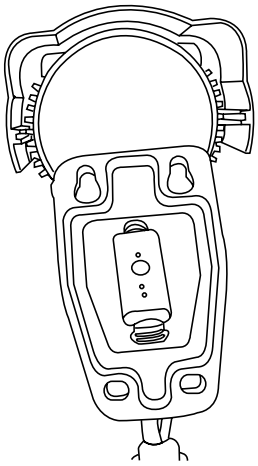

1 - Pull off the cable to access to the zoom and focus control.

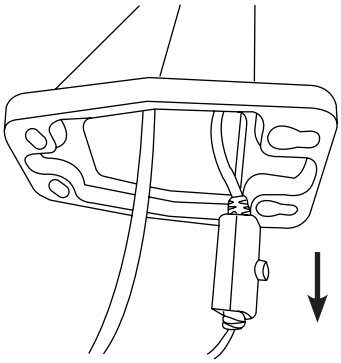

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

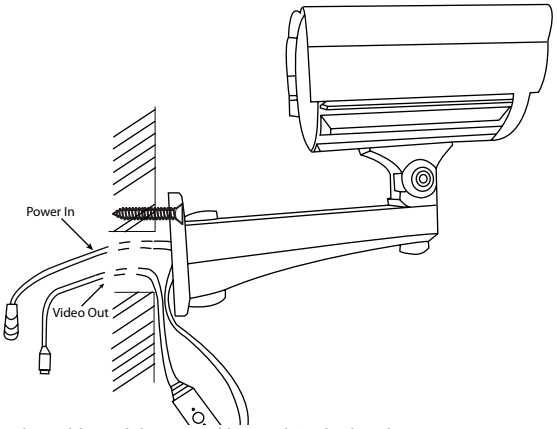

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

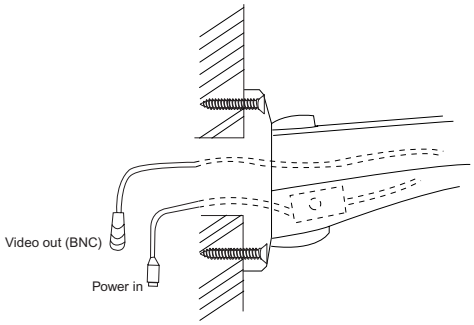

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120

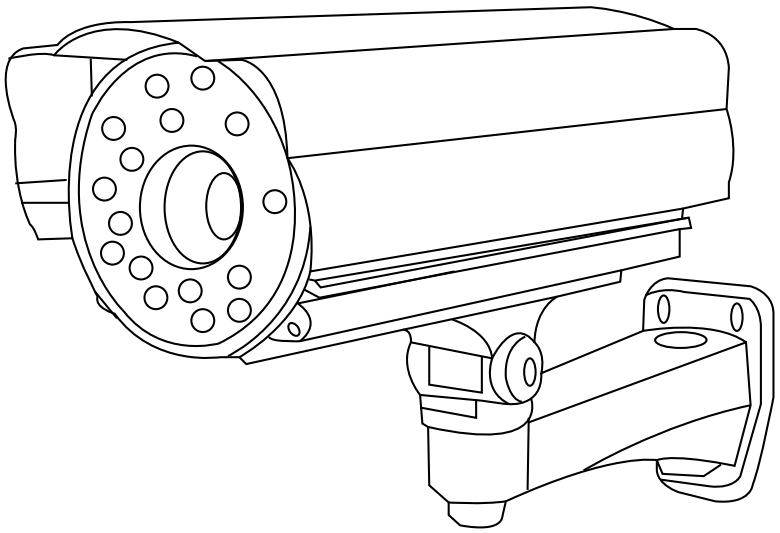

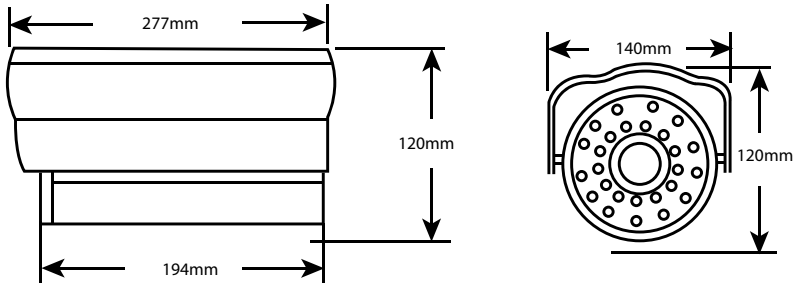

Warning

- The installation and calibration must be carried out by highly skilled personnel.
- Do not open there may be a risk of electric shock.

Use only for the following temperature conditions: from (-10) to (+50) °C.
Do not use with voltages different from the ones specified.

Safety instructions (TR) (CY)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire.
Before carrying out the installation, read the instructions and take account of the product's specific mounting location.
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.
Use only Legrand brand accessories.

Installation

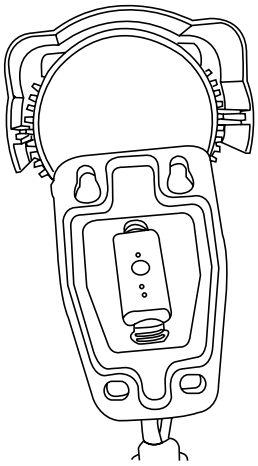

1 - Pull off the cable to access to the zoom and focus control.

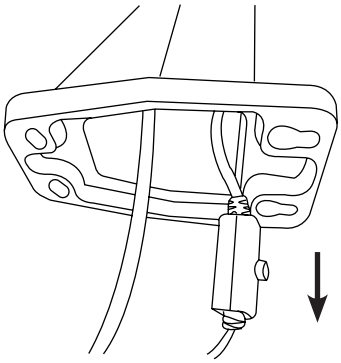

2 - Prepare the camera to be wall mounted (with 2 screws) and turn the camera to suitable position.

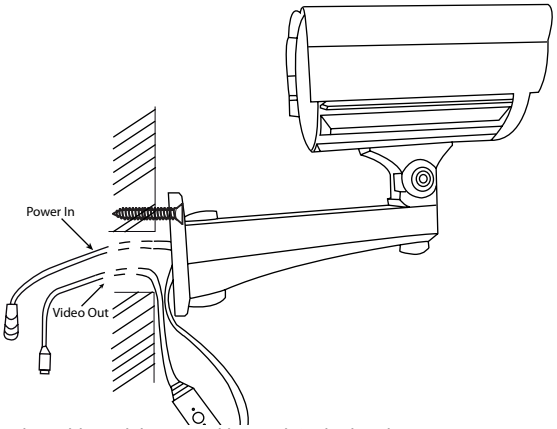

3 - Adjust zoom and focus with the button control.



Left and right zoom control
Up and down focus control

4 - Put the cable and the control button into the bracket

5 - Fix definitively the camera on the wall

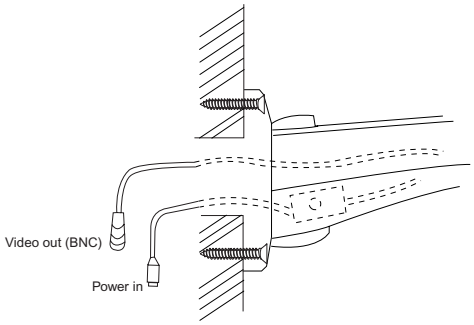

Specifications	
Sensor	1/3" Color Sony Super HAD CCD
Day/Night	Yes
ICR	No
TV System	PAL
Horizontal resolution	540 color - White and Black: 600 TV Lines
Minimum illumination	0 Lux
S/N ratio	> 48 db
Auto electronic Shutter	Yes
Auto iris control	Yes
Gamma characteristic	/
Auto gain control	Yes
Auto white balance	ATW 2000 - 10 000
Back light compensation	Yes
Synchronous system	Internal
Lens mount	6 - 60 mm
Video output	1.0 VP-P, 75 Ω / BNC
Infrared lamps irradiation distance	100 m
IP degree	IP65
Power supply	20 W
Input current	110 ~ 230 V 50 Hz
Operating temperature	-10°C ~ 50°C
Dimensions	277 x 140 x 120